



TDS**ERAS-60xLL-0-T25-15C****GBS-60**Torx 25 drive
Incl. EF-head mark**PRODUCT DESCRIPTION**

6.0mm diameter screw for fixing to aerated concrete with EF head mark and recess TX25. The screw has a hardened S-point and the material is steel zinc plated with a Eurofast Coat 15C which complies with 15-cycles Kesternich resistance according to **ETA-23/0651**. The recommended length into the aerated concrete is min. 60mm.

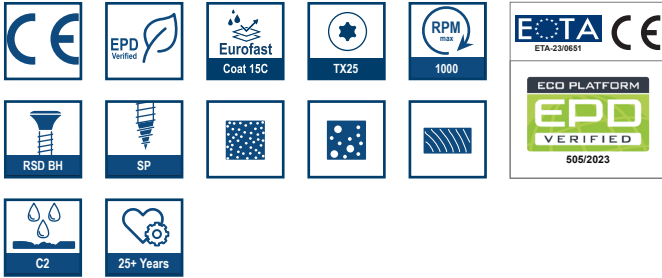

**Recommended
length into the
aerated concrete**

Min. 60mm

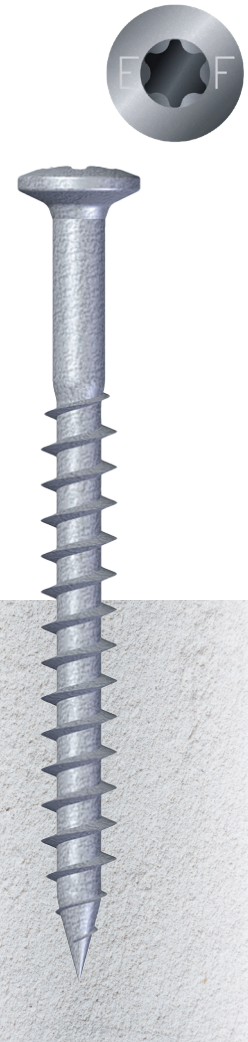

Substrate		
Aerated concrete	AAC 600 kg/m ³	EN 12602
Concrete	C12/15, C20/25, C25/30	EN-206-1
OSB/3	$\rho_{min}=550\text{kg/m}^3$	EN 12369-1
Chipboard	$\rho_{min}=600\text{kg/m}^3$	EN 12369-1
Installation data		
Head type:	Raised Bugle Head	
Recess:	TX25	
Anchoring depth on aerated concrete deck hef:	$\geq 60\text{mm}$	
Anchoring depth on concrete deck hef:	$\geq 30\text{mm}$	
Concrete drill diameter:	5,0mm	
Drilled hole depth in concrete:	hef + 10mm	
Fixing on wooden deck:	Full thread trough wooden substrate	
Installation force on aerated concrete deck:	15kg	
Installation tool speed on aerated concrete deck:	1000rpm	
Installation force on concrete deck:	15kg + impact	
Installation tool speed on concrete deck:	100rpm	
Installation force on wooden deck:	30kg	
Installation tool speed on wooden deck:	2000~2500rpm	

TECHNICAL DATASHEET

PRODUCT GROUP SCREW Ø SCREW LENGTH DRILLING CAPACITY HEAD TYPE COATING/MATERIAL PACKAGE TYPE PACKAGE QUANTITY												PRODUCT KEY	PREVIOUS PRODUCT KEY	
ERAS	-	60	060	-	0	-	T25	-	15C	-	B	500	ERAS-60060-0-T25-15C-B500	GBS-60060
ERAS	-	60	070	-	0	-	T25	-	15C	-	B	500	ERAS-60070-0-T25-15C-B500	GBS-60070
ERAS	-	60	080	-	0	-	T25	-	15C	-	B	500	ERAS-60080-0-T25-15C-B500	GBS-60080
ERAS	-	60	090	-	0	-	T25	-	15C	-	B	500	ERAS-60090-0-T25-15C-B500	GBS-60090
ERAS	-	60	100	-	0	-	T25	-	15C	-	B	500	ERAS-60100-0-T25-15C-B500	GBS-60100
ERAS	-	60	110	-	0	-	T25	-	15C	-	B	500	ERAS-60110-0-T25-15C-B500	GBS-60110
ERAS	-	60	120	-	0	-	T25	-	15C	-	B	500	ERAS-60120-0-T25-15C-B500	GBS-60120
ERAS	-	60	130	-	0	-	T25	-	15C	-	B	500	ERAS-60130-0-T25-15C-B500	GBS-60130
ERAS	-	60	140	-	0	-	T25	-	15C	-	B	500	ERAS-60140-0-T25-15C-B500	GBS-60140
ERAS	-	60	160	-	0	-	T25	-	15C	-	B	500	ERAS-60160-0-T25-15C-B500	GBS-60160
ERAS	-	60	180	-	0	-	T25	-	15C	-	B	500	ERAS-60180-0-T25-15C-B500	GBS-60180
ERAS	-	60	200	-	0	-	T25	-	15C	-	B	500	ERAS-60200-0-T25-15C-B500	GBS-60200