

EUROFAST®

“Fixed quality”


EDS-B-48



Product key ERSS-2-T25-15C

4.8mm diameter screw for fixing to steel deck $\leq 2 \times 1.25\text{mm}$. Equipped with an EF headmark with recess TX25. The screw has a reduced drill point, and the material is steel zinc plated with a Magni-Silver coating which complies with 15-cycle Kesternich according to ETA 06-007. The insertion depth is 20mm



Product Key	Ø	L1	L2	Box Qty
EDS-B-48035	4.8	35	30	1000
EDS-B-48050	4.8	50	45	1000
EDS-B-48060	4.8	60	50	1000
EDS-B-48070	4.8	70	50	1000
EDS-B-48080	4.8	80	50	1000
EDS-B-48090	4.8	90	50	1000
EDS-B-48100	4.8	100	80	500
EDS-B-48110	4.8	110	80	500
EDS-B-48120	4.8	120	80	500
EDS-B-48130	4.8	130	100	500
EDS-B-48140	4.8	140	100	500
EDS-B-48150	4.8	150	100	500
EDS-B-48180	4.8	180	120	500
EDS-B-48210	4.8	210	120	500
EDS-B-48240	4.8	240	120	500
EDS-B-48260	4.8	260	120	500
EDS-B-48280	4.8	280	120	500
EDS-B-48300	4.8	300	120	500

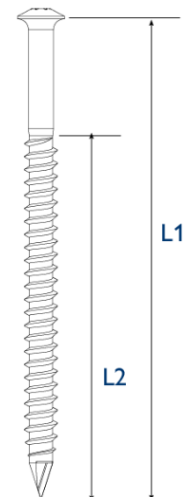

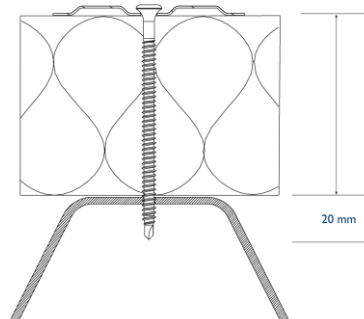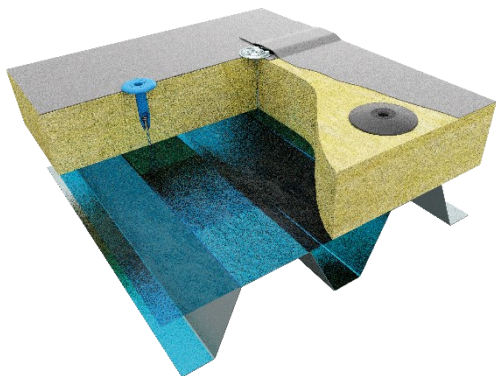

Specifications

Search Description	ERSS-2-T25-15C
Article Category	EDS-B-48
Screw diameter	4.8mm
Applicable in	Steel deck $\leq 2 \times 1.25 \text{ mm}$
Point type	Reduced drill point
Recess	Torx 25
Material screw	Steel zinc plated
Coating screw	Magni-Silver coating
Corrosion resistance screw	15-cycli Kesternich
Certification screw	ETA 23/0651
Approvals	FM Approved
Optical characteristic screw	EF Headmark
Processing instructions	Steel deck: transfix 20mm through steel deck